


3/8" Nozzle Kit with PT Connector

Part Number: CS83030

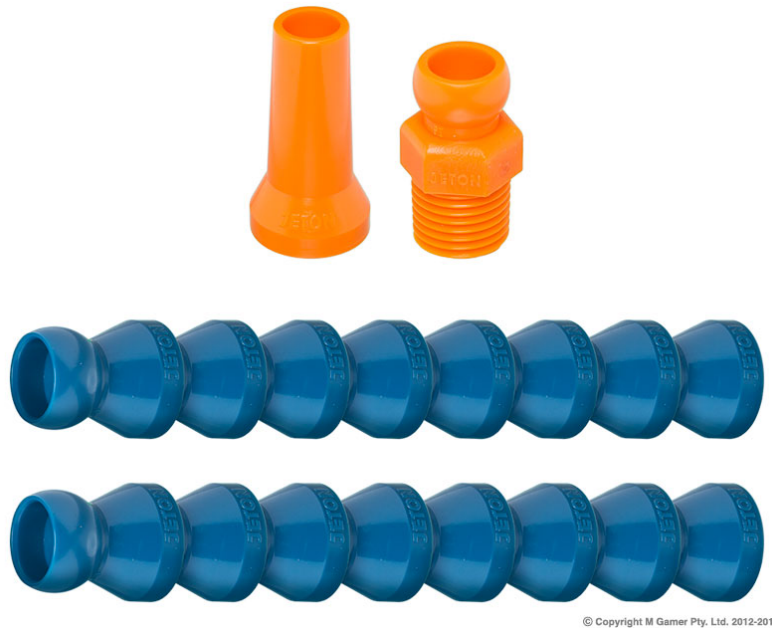

© Copyright M Gamer Pty. Ltd. 2012-2015

SPECIFICATIONS

Eight 3/8" Segments, 3/8" Round Nozzle and 3/8" Male NPT Connector

Flow Rate: 1500 Ltr/Hr
Max. Pressure: 100 PSI

FEATURES

- Made from petroleum resistant POM plastic which is ideal for use with:
- alcohols, ethyl, acetone, commercial detergents, gasoline, greases, lacquer solvents, oils, sodium hydroxide, insecticides & brake fluids.
- Is not electricity conductive and is suitable for use on electrical discharge (EDM) machines.
- Maximum operating temperature: 65° C
-
- NOT SUITABLE for use with strong acids or bases, ammonium hydroxide(strong), Hypochlorite Ion solutions, Sodium hypochlorite.

SHIPPING WEIGHT: 0.01 Kg

ACCESSORIES



1-1/4" Flare Nozzle (Pack of 2)



1/4" Nozzle (Pack of 4)



Soluble Cutting Oil 5Ltr



3/8" Hose Assembly Pliers